

Cold drawn bewehrungsdraht P B500A

ROL.WA-BD-B500A

KG / COIL



ø 5	2.000
ø 6	2.000
ø 7	2.000
ø 8	2.000
ø 10	2.000
ø 12	2.000

Other combinations on demand.

Grade B500A

Mechanical characteristics	Yield Strength Re (Mpa)	Stress ratio Rm / Re		Total elongation at max force Agt %	
		5 ≤ d ≤ 5.5	d ≥ 6	5 ≤ d ≤ 5.5	d ≥ 6
Minimum characteristic value Cv	500	1,03	1,05	2	2,5

Producers mark

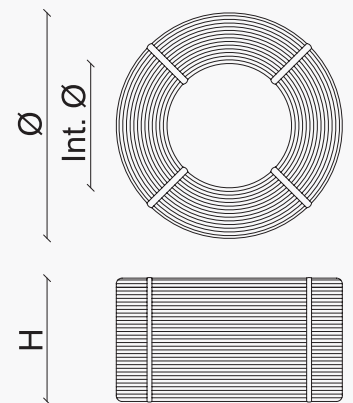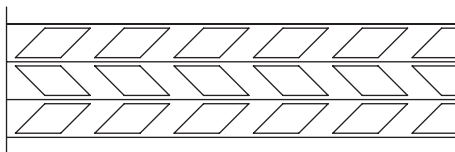

Certificates Intersig nv



Certificates Intersig France sarl

Certificates Van Merksteijn Steel bv



For the up to date scope on our certificates, we would like to refer you to our website.