


## Standard mesh France B500B

NSFR.WB

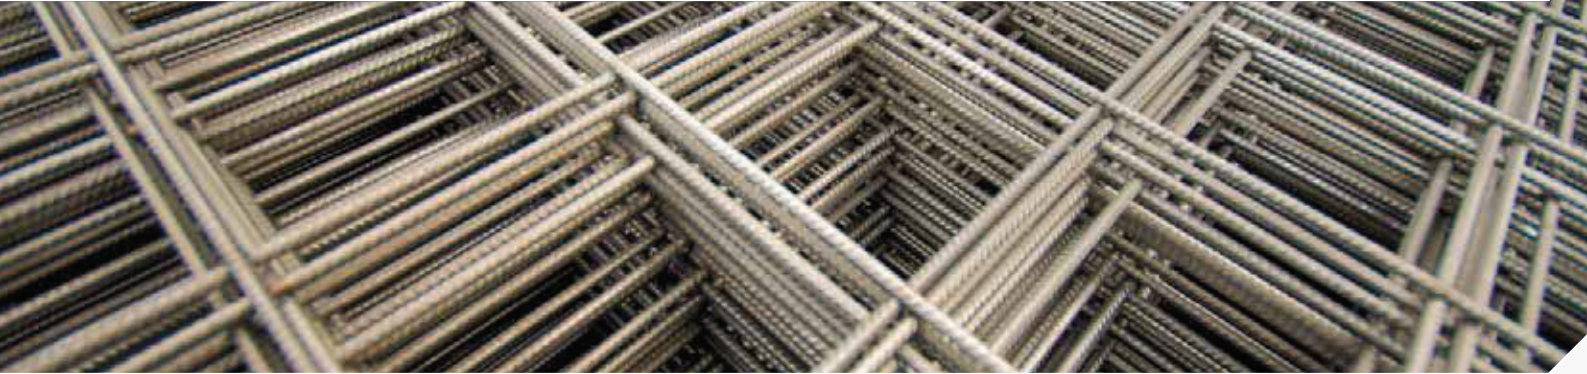

Type	Ø mm	Dimensions L x B (mm)	Centers (mm)	Weight kg/Piece	Pieces/Bundle	Weight kg/Bundle
TS 25 C	7 - 7	6000 x 2400	150 - 150	57,984	30	1.739
TS 35	7 - 7	6000 x 2400	100 - 300	57,984	30	1.739
TS 40 C	7 - 7	6000 x 2400	100 - 100	86,980	20	1.739
TS 50	8 - 8	6000 x 2400	100 - 300	75,840	20	1.516
TS 50 C	8 - 8	6000 x 2400	100 - 100	113,760	15	1.706
TS 60	9 - 9	6000 x 2400	100 - 250	100,598	16	1.610

**Rebar type**

- Long rods                                 Grade B500B - BE500TS (Ribbed)
- Cross Rods                                Grade B500B - BE500TS (Ribbed)

Type	L1	AL x M	L2	B1	AB x M	B2
TS 25 C	75	39 x 150	75	75	15 x 150	75
TS 35	150	19 x 300	150	50	23 x 100	50
TS 40 C	50	59 x 100	50	50	23 x 100	50
TS 50	150	19 x 300	150	50	23 x 100	50
TS 50 C	50	59 x 100	50	50	23 x 100	50
TS 60	100	23 x 250	100	50	23 x 100	50

Certificates Intersig nv

Certificates Intersig France sarl




Certificates Van Merksteijn Steel bv

For the up to date scope on our certificates, we would like to refer you to our website.



Dimensions

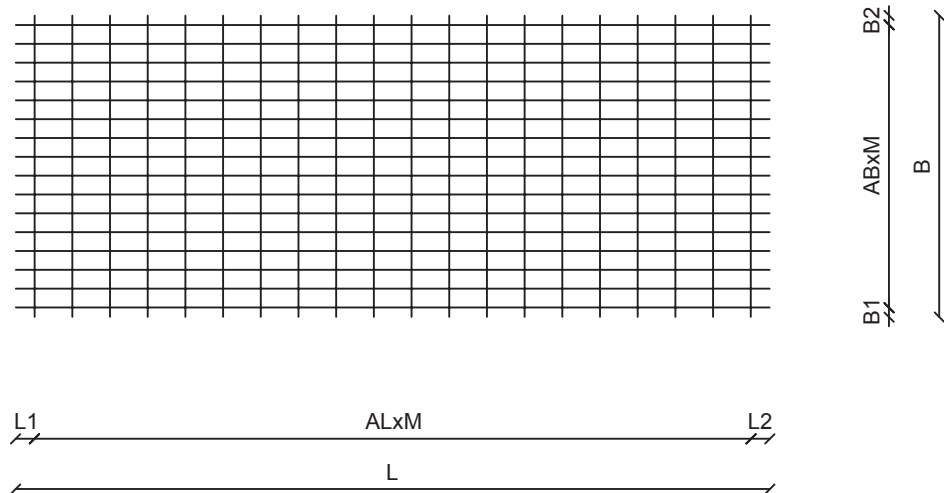

Certificates Intersig nv

Certificates Intersig France sarl



Certificates Van Merksteijn Steel bv

For the up to date scope on our certificates, we would like to refer you to our website.