


Barres laminées à chaud B500B

HWL.GR-B500B

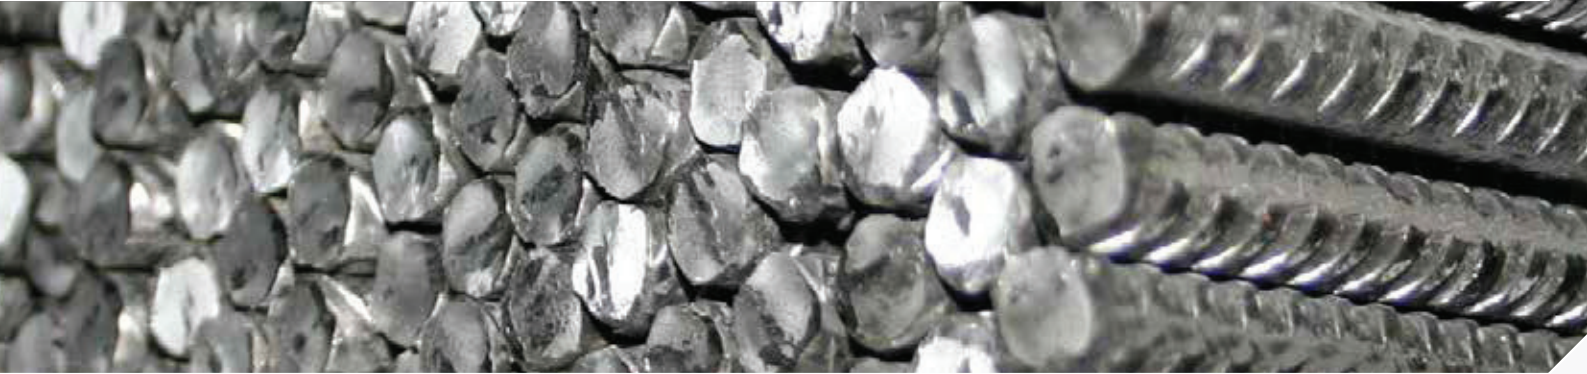

	Pièces / paquet			KG/M
	6 m 1500 Kg / Paq	12 m 2500 Kg / Paq	14 m 2500 Kg / Paq	
ø 8	+/- 630	+/- 530	+/- 450	0,395
ø 10	+/- 400	+/- 340	+/- 290	0,617
ø 12	+/- 280	+/- 235	+/- 200	0,888
ø 14	+/- 207	+/- 172	+/- 147	1,208
ø 16	+/- 160	+/- 132	+/- 115	1,578
ø 20	+/- 100	+/- 83	+/- 72	2,466
ø 25	+/- 65	+/- 54	+/- 46	3,853
ø 32		+/- 32	+/- 28	6,313
ø 40		+/- 21	+/- 18	9,865

Dimensions



Classe Technique B500B - BE500TS

Caractéristiques mécaniques	Limite d'élasticité Re (Mpa)	Rapport Rm / Re	Allongement total à charge maximale Agt %
Valeur caractéristique minimale Cv	500	1,08	5,5

Certificats Intersig nv



Certificats Intersig France sarl



Certificats Van Merksteijn Steel bv



Vous pouvez retrouver la portée actuelle de nos certificats sur nos sites web.