

Koudgetrokken glad B500A
ROL.WA-GL-B500A


	KG / ROL		
ø 4*	2.000		
ø 4.5*		2.500	
ø 5			3.000
ø 6			3.000
ø 7			3.000
ø 8			3.000
ø 10			3.000

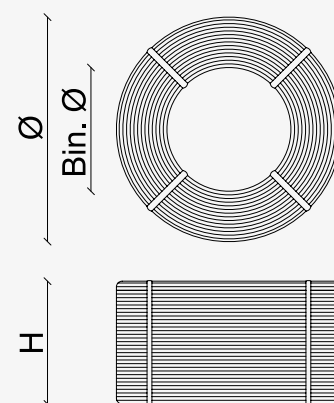
* Diameters < ø5 zijn kwaliteit B500 ipv B500A.
Andere combinaties op aanvraag.

Richtwaarden

	1.600 KG	2.000 KG	2.500 KG	3.000 KG	4.000 KG	5.000 KG
Bin. ø	600	600	600	600	600	600
H (mm)	700	700	700	700	980	980
ø (mm)	1.000	1.100	1.200	1.200	1.200	1.300

Technische Klasse B500A - DE500BS (Glad)

Mechanische karakteristieken	Rekgrens Re (Mpa)	Verhouding Rm / Re		Totale rek bij maximale kracht Agt %	
		5 ≤ d ≤ 5.5	d ≥ 6	5 ≤ d ≤ 5.5	d ≥ 6
Minimum karakteristieke waarde Cv	500	1,03	1,05	2,5	3,5


Certificaten Intersig nv

Certificaten Intersig France sarl
Certificaten Van Merksteijn Steel bv

Voor de up-to-date scope van onze certificaten verwijzen wij u graag door naar onze website.