

Koudgetrokken gedeukt B500B

ROL.WA-EM-B500B



	KG / ROL	
ø 6	1.600	
ø 8		2.500
ø 10		2.500
ø 12		2.500
ø 14		2.500
ø 16		2.500

Andere combinaties op aanvraag.

Richtwaarden



	1.600 KG	2.000 KG	2.500 KG	3.000 KG	4.000 KG	5.000 KG
Bin. ø	600	600	600	600*	600	600*
H (mm)	700	700	700	700	980	980
ø (mm)	1.000	1.100	1.200	1.200	1.200	1.300

*Rollen ø20 hebben een binnendiameter van 900 mm

Technische Klasse B500B - BE500ES (Gedeukt)

Mechanische karakteristieken	Rekgrens Re (Mpa)	Verhouding Rm / Re	Totale rek bij maximale kracht Agt %
Minimum karakteristieke waarde Cv	500	1,08	5,5

Walsprofiel

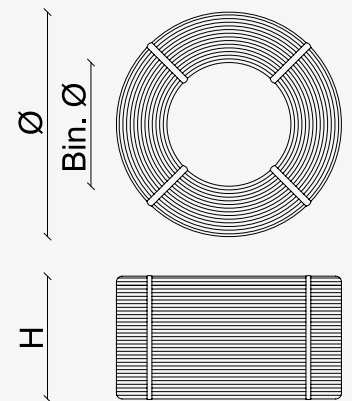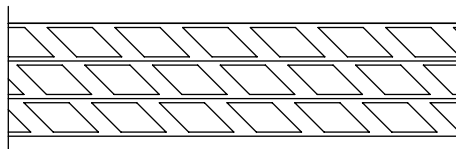

Certificaten Intersig nv



Certificaten Intersig France sarl



Certificaten Van Merksteijn Steel bv



Voor de up-to-date scope van onze certificaten verwijzen wij u graag door naar onze website.