


SPACER TYPE A HEAVY DUTY

Height (mm)	Width (mm)	Under packaging	Commercial packaging
50	75	25	250
60	75	25	250
70	75	25	250
75	75	25	250
80	75	25	250
90	75	25	250
100	75	25	250
105	75	25	250
110	75	25	250
120	75	25	250
130	75	25	250
135	75	25	250
140	75	25	250
150	75	25	250
160	75	25	250
165	75	25	250
170	75	25	250
180	75	25	250
190	75	25	250
200	75	25	250
210	85	10	100
220	85	10	100
230	85	10	100
240	85	10	100
250	85	10	100
260	85	10	100
270	85	10	100
280	85	10	100
290	85	10	100
300	85	10	100
310		on request	
320	90	50	50
330		on request	
340	90	50	50
350		on request	
360	90	50	50
370		on request	
380	90	50	50
390		on request	
400	90	50	50

Length: 2 meter

Version August 2020

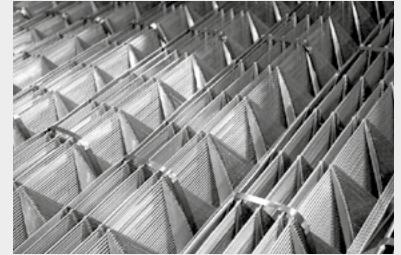

Certificates Intersig nv




Please refer to our website for the up-to-date scope of our certificates.

INTERSIG

SPACER TYPE A HEAVY DUTY

Version August 2020

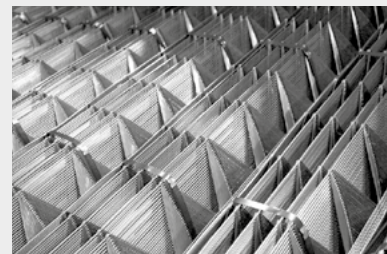

Certificates Intersig nv




Please refer to our website for the up-to-date scope of our certificates.

INTERSIG

DIMENSIONS

H	50-400	Calculated height	mm
B	75-90	Total width	
Ps	200	Step of the diagonals	
R	10	Bend diameter	

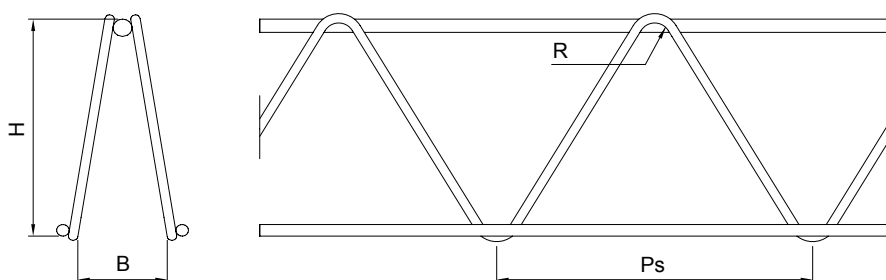

REBAR TYPE

- Upper wire B500 smooth
- Diagonal wires B500 smooth
- Lower wires B500 smooth

RECOMMENDED DISTANCE BETWEEN THE SPACERS

Reinforcement diameter	Distance between the spacers	Required length / m2
< 6,0 mm	500mm	2,00 lm / m2
6,5 mm t/m 12 mm	700mm	1,50 lm / m2
> 12 mm	700mm	1,50 lm / m2

MAXIMUM DEFLECTION

Load	Height
4 kN	50 < h < 400 mm
6 kN	6mm

Note: calculated according to equally divided maximum weight on a 1,35m² bearing surface (cfr. DBV-test)