




Version November 2022


LATTICE GIRDERS FOR ARMED ROADS CWR

DIMENSIONS

	(mm)	
H1	90 - 140	Calculated height
H2	H1 + 8	Total height
B1	70 - 120	Total width
1	12 - 16	Upper wire
2	4 - 6	Diagonal wires
3	4 - 8	Lower wires
U1	4	Upper protrusion
U2	4	Lower protrusion
Ps	200	Step of the diagonals

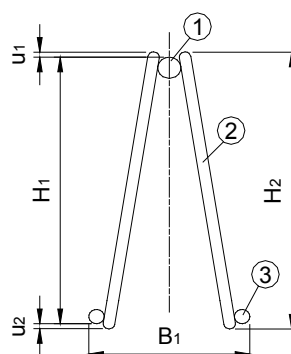

H1	90	100	110	120	130	140
μ	46°	49°	52°	55°	57°	59°


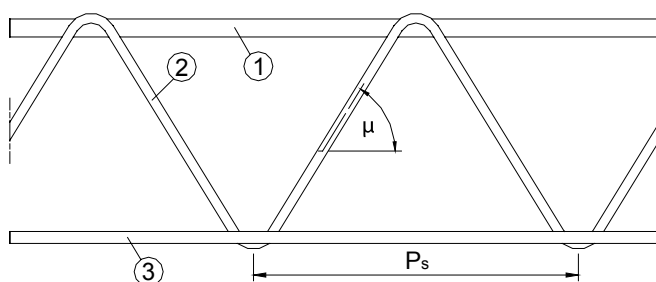


REMARKS


- Girders cut to length: from 2m up to 14m in steps of 10cm

REBAR TYPE

- Upper wire: B500A ribbed
- Diagonal wires: B500B indented
- Lower wires: B500 smooth, B500A smooth
- B500 ribbed, B500A ribbed

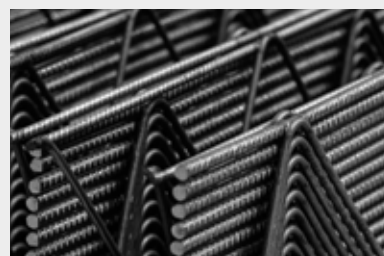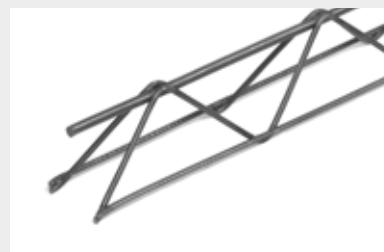

Certificates Intersig NV



Certificates
Van Merksteijn International



For the up to date scope on
our certificates, we would like
to refer you to our website.