

TREILLIS


TREILLIS STANDARDS

PAYS-BAS

Type	Ø (mm)	Dimensions LxL (mm)	Mailles (mm)	Poids (kg/pièce)	Pièces/paquet	Poids (kg/paquet)	Écart par type (€/tonne)
PS 130 A	5	3000x2000	150-150	12,63	50	632	300
PS 196 A	5	3000x2000	100-100	18,48	50	924	310
PS 188 A	6	3000x2000	150-150	18,20	50	910	230
PS 335 A	8	3000x2000	150-150	32,39	40	1296	215
P 130 A	5	5000x2000	150-150	20,17	50	1009	290
P 188 A	6	5000x2000	150-150	29,08	50	1454	220
P 335 A	8	5000x2000	150-150	51,75	30	1553	205
P 524 A	10	5000x2000	150-150	80,83	20	1617	205
BEC 188 A	6	5950x2350	150-150	36,48	40	1459	220
BEC 257 A	7	5960x2360	150-150	49,77	30	1493	210
BEC 335 A	8	4450x2350	150-150	45,23	30	1357	205
BEC 503 A	8	3500x2200	100-100	49,57	30	1487	215
BEC 424 A	9	6000x2400	150-150	79,04	20	1581	205
B 524 A	10	5900x2300	150-150	89,71	15	1346	205
B 785 A	10	6000x2400	100-100	141,42	10	1414	215

TYPE DE ROND À BÉTON

- Barres longitudinales: B500A - DE500BS cranté
- Barres transversales: B500A - DE500BS cranté

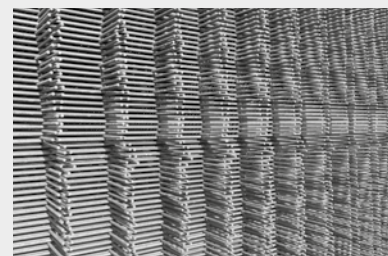

Certificats Intersig NV

BENOR

Certificats
Van Merksteijn
International



Certificats
Intersig France



Vous pouvez retrouver la portée actuelle de nos certificats sur nos sites web.