

SPACER TYPE ZZ HEAVY DUTY ZZ.HD.DBV

Height (mm)	Sub-packaging (pieces/bundle)	Packaging (pieces/bundle)	Commercial transport packaging (pieces/pallet)	Indicative height (kg/pallet)	Indicative weight (kg/pallet)
20	25	1200	3600	800	1307
30	25	1200	3600	760	1400
40	25	1200	3600	920	1443
50	25	1200	2400	1020	1089
60	25	1200	2400	936	1132
70	25	1200	2400	1062	1173
80	25	1000	2000	1020	1022
90	25	1000	2000	1125	1058
100	25	1000	2000	1230	1094
110	25	800	1600	1104	912
120	25	800	1600	1188	941
130	25	800	1600	1272	970
140	25	600	1200	1062	762
150	25	600	1200	1125	782
160	25	600	1200	1188	804
180	25	600	1200	1314	1030
200	25	400	800	1020	732
220	25	400	800	1104	760
240	25	400	800	1188	788
260	25	200	600	999	702
280	25	150	450	1062	559
300	25	150	450	1125	579
320	25	150	300	852	416
340	25	150	300	894	451
360	25	150	300	936	466
380	25	150	300	978	481
400	25	150	300	1020	496



NO PROTRUDING WIRES (PATENTED)



EASY TO SLIDE



SAFE



STABLE: BEARING SURFACE OF 20CM

Certificates Intersig NV



For the up to date scope on our certificates, we would like to refer you to our website.

INTERSIG

SPACER TYPE ZZ HEAVY DUTY ZZ.HD.DBV

DIMENSIONS

Length	2m
Bearing surface	20cm

RECOMMENDED DISTANCE BETWEEN THE SPACERS

Reinforcement diameter	Distance between the spacers	Required length/m ²
< 6,5mm	500mm	2,00lm/m ²
6,5mm to 12mm	700mm	1,50lm/m ²
>12mm	700mm	1,50lm/m ²

MAXIMUM DEFLECTION

Load	Height
6 kN	50 < H < 400mm 6mm

Note: calculated according to equally divided maximum weight on a 1,35m² bearing surface (cfr. DBV-test)

PACKAGING & TRANSPORT

The spacers are nested for compact packaging.

- Advantage
- 40% less volume
 - bundles are more stable



Sub-packaging of 25 pieces.

Commercial transport packaging: 2 to 3 bundles per pallet.

- Advantage
- faster loading and unloading: economical
 - fewer pallets: ecological


Full truck load: 24 pallets.



NO PROTRUDING WIRES (PATENTED)



EASY TO SLIDE

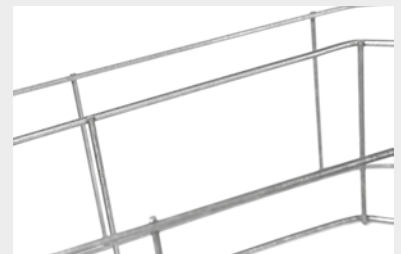


SAFE



STABLE: BEARING SURFACE OF 20CM

Certificates Intersig NV



For the up to date scope on our certificates, we would like to refer you to our website.

INTERSIG